(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



. I DEGNA SOMEREN DE BENNE HERRI BENNE SENDE SKIL I IN DIE BENN ABHRE ERROL BURG DIE BEN KOM BENERAM DER FRAN ERGE

(43) International Publication Date 3 February 2005 (03.02.2005)

PCT

(10) International Publication Number WO 2005/009541 A1

(51) International Patent Classification7:

A62B 1/06

(21) International Application Number:

PCT/KR2004/001785

(22) International Filing Date:

19 July 2004 (19.07.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 10-2003-0051573

25 July 2003 (25.07.2003) KR

(71) Applicant and

(72) Inventor: CHUN, Jung-Myung [KR/KR]; 12-2, Young-woon-ri, Sanyang-up, Tongyong city, Kyongsannam-do 650-943 (KR).

(72) Inventors; and


(75) Inventors/Applicants (for US only): KIM, Myoung-Oh

[KR/KR]; Room. 502, Samsung Apt 2dong, 290-2, Manduk-dong, Puk-gu, Pusan 616-826 (KR). CHUN, Jac-Ryoong [KR/KR]; Room.B-9, 1398, Chongnyang-dong, Tongyong city, Kyongsannam-do 650-030 (KR).

- (74) Agent: CHUN, Hoy-Nam; Room No. 206, Hanju Bldg 647, Yeoksam-dong, Kangnam-gu, Seoul 135-080 (KR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: PERSONAL DESCENT APPARATUS

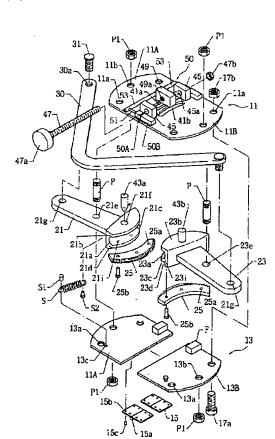

(57) Abstract: A personal descent apparatus for evacuating occupants from a high elevation of tall building under emergency. The personal descent apparatus comprises a pair of supporting plates connected to each other front and rear with a predetermined gap, braking rods rotatably fixed to the pair of supporting plates in the predetermined gap between the pair of supporting plates, the braking rods form a passage which is formed by two guide grooves each of which is tapered and formed at arc ends facing to each other, so that a rope is inserted to the passage, and weight receiving means connected to both ends of the braking rods for receiving a load, wherein the braking rods are rotated by the load.

VO 2005/009541 A1

WO 2005/009541 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

with international search report